


TL2001

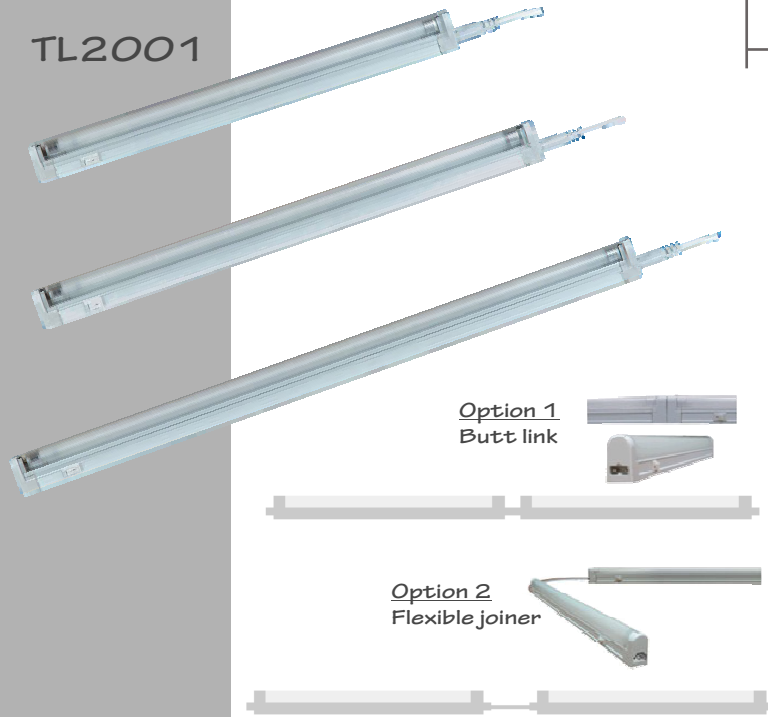

SLIMLINE LINKABLE T5

DESCRIPTION

Linkable fluorescent light fittings

Features:

- Ultra slim design enhances light output
- T5 Electronic ballast
- Instant start up
- Easy touch ON/OFF switch
- Extruded PVC housing
- Frosted polycarbonate diffuser
- Complete with T5 4000K fluorescent tube
- Up to 10 fittings may be linked together to form a continuous strip of light using the flexible links supplied with the fittings.
- Average lamp life: 15,000hrs
- IP Rating: IP20


Accessories Included:

- 1.) Mounting bracket 1 set
- 2.) Flex and plug
- 3.) Straight connector
- 4.) 150mm Flexible joiner





Specifications:

Item no.	Wattage	Avg. Lamp life.	Dimension (mm)	Lumen Output
TL2001/8	8w	15,000hrs	L343 x H43 x W23	700
TL2001/14	14w	15,000hrs	L615 x H43 x W23	1250
TL2001/21	21w	15,000hrs	L904 x H43 x W23	1930
TL2001/28	28w	15,000hrs	L1204 x H43 x W23	2670
TL2001/35	35w	15,000hrs	L1504 x H43 x W23	3440

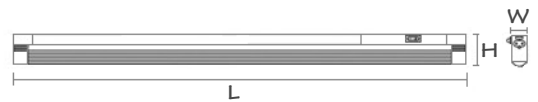

LINEAR FLUORESCENT

TL2016

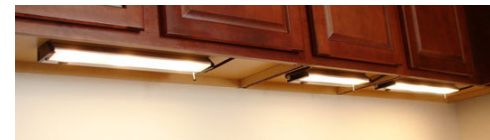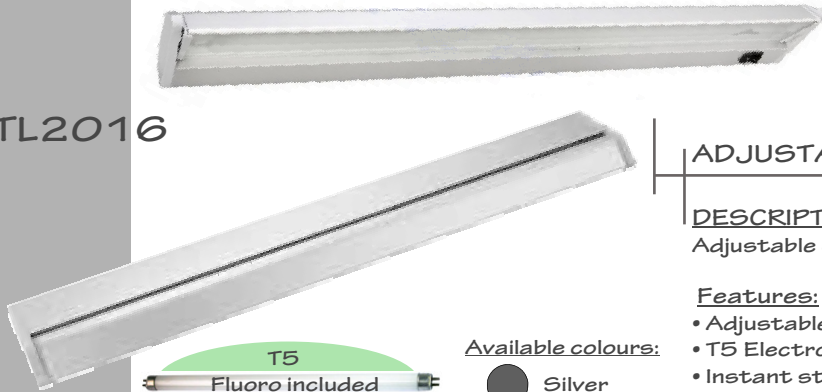

ADJUSTABLE CABINET LIGHTS T5

DESCRIPTION


Adjustable cabinet light fittings

Features:

- Adjustable (135°) wall mount or under cabinet lighting
- T5 Electronic ballast
- Instant start up
- Easy touch ON/OFF switch
- Frosted glass diffuser
- Complete with T5 4000K fluorescent tube
- Average lamp life: 15,000hrs
- Complete with accessories for easy installations.
- IP Rating: IP20


Installation Option:

For hardwire version add suffix "H" after P/N.



Specifications:

Item no.	Wattage	Avg. Lamp life.	Dimension (mm)	Lumen Output
TL2016/8	8w	15,000hrs	L350 x H30 x W88	700
TL2001/14	14w	15,000hrs	L578 x H30 x W88	1250
TL2001/21	21w	15,000hrs	L910 x H30 x W88	1930

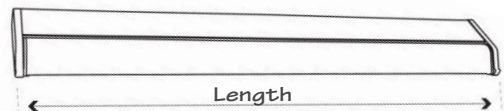

*** Note: *** 21W available in hardwire only.